


Core drills HSS and HSSE-Co 5 with weldon shank (3/4"), cutting depth 30,0 mm

Ejector pin: Article no. 108 304 (Ø 6,35 x 77,0 mm)

Packing unit: in plastic tubes of 1

Steel (N/mm2) < 900	■	■	■
Steel (N/mm2) < 1100		■	■
Steel (N/mm2) < 1300		□	□
Rust-resistant steel		■	■
Aluminium	■	■	■

Brass	■	■	■
Bronze	□	□	□
Plastics	■	■	■
Cast iron	□	□	□
Titanium alloyed			

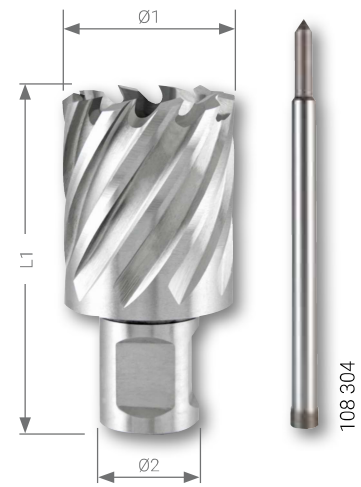

Ø1 mm	Ø2 mm	L1 mm	Cutting depth mm	HSS	HSSE Co 5	HSS TITAN	
12,0	19,0	63,0	30,0	108 212	108 212 E	108 212 F	1
13,0	19,0	63,0	30,0	108 213	108 213 E	108 213 F	1
14,0	19,0	63,0	30,0	108 214	108 214 E	108 214 F	1
15,0	19,0	63,0	30,0	108 215	108 215 E	108 215 F	1
16,0	19,0	63,0	30,0	108 216	108 216 E	108 216 F	1
17,0	19,0	63,0	30,0	108 217	108 217 E	108 217 F	1
18,0	19,0	63,0	30,0	108 218	108 218 E	108 218 F	1
19,0	19,0	63,0	30,0	108 219	108 219 E	108 219 F	1
20,0	19,0	63,0	30,0	108 220	108 220 E	108 220 F	1
21,0	19,0	63,0	30,0	108 221	108 221 E	108 221 F	1
22,0	19,0	63,0	30,0	108 222	108 222 E	108 222 F	1
23,0	19,0	63,0	30,0	108 223	108 223 E	108 223 F	1
24,0	19,0	63,0	30,0	108 224	108 224 E	108 224 F	1
25,0	19,0	63,0	30,0	108 225	108 225 E	108 225 F	1
26,0	19,0	63,0	30,0	108 226	108 226 E	108 226 F	1
27,0	19,0	63,0	30,0	108 227	108 227 E	108 227 F	1
28,0	19,0	63,0	30,0	108 228	108 228 E	108 228 F	1
29,0	19,0	63,0	30,0	108 229	108 229 E	108 229 F	1
30,0	19,0	63,0	30,0	108 230	108 230 E	108 230 F	1
31,0	19,0	63,0	30,0	108 231	108 231 E	108 231 F	1
32,0	19,0	63,0	30,0	108 232	108 232 E	108 232 F	1
33,0	19,0	63,0	30,0	108 233	108 233 E	108 233 F	1
34,0	19,0	63,0	30,0	108 234	108 234 E	108 234 F	1
35,0	19,0	63,0	30,0	108 235	108 235 E	108 235 F	1
36,0	19,0	63,0	30,0	108 236	108 236 E	108 236 F	1
37,0	19,0	63,0	30,0	108 237	108 237 E	108 237 F	1
38,0	19,0	63,0	30,0	108 238	108 238 E	108 238 F	1
39,0	19,0	63,0	30,0	108 239	108 239 E	108 239 F	1
40,0	19,0	63,0	30,0	108 240	108 240 E	108 240 F	1
41,0	19,0	63,0	30,0	108 241	108 241 E	108 241 F	1
42,0	19,0	63,0	30,0	108 242	108 242 E	108 242 F	1
43,0	19,0	63,0	30,0	108 243	108 243 E	108 243 F	1
44,0	19,0	63,0	30,0	108 244	108 244 E	108 244 F	1
45,0	19,0	63,0	30,0	108 245	108 245 E	108 245 F	1
46,0	19,0	63,0	30,0	108 246	108 246 E	108 246 F	1
47,0	19,0	63,0	30,0	108 247	108 247 E	108 247 F	1
48,0	19,0	63,0	30,0	108 248	108 248 E	108 248 F	1
49,0	19,0	63,0	30,0	108 249	108 249 E	108 249 F	1
50,0	19,0	63,0	30,0	108 250	108 250 E	108 250 F	1
51,0	19,0	63,0	30,0	108 251	108 251 E	108 251 F	1
52,0	19,0	63,0	30,0	108 252	108 252 E	108 252 F	1
53,0	19,0	63,0	30,0	108 253	108 253 E	108 253 F	1
54,0	19,0	63,0	30,0	108 254	108 254 E	108 254 F	1
55,0	19,0	63,0	30,0	108 255	108 255 E	108 255 F	1
56,0	19,0	63,0	30,0	108 256	108 256 E	108 256 F	1
57,0	19,0	63,0	30,0	108 257	108 257 E	108 257 F	1
58,0	19,0	63,0	30,0	108 258	108 258 E	108 258 F	1
59,0	19,0	63,0	30,0	108 259	108 259 E	108 259 F	1
60,0	19,0	63,0	30,0	108 260	108 260 E	108 260 F	1



RS5e / RS10 / RS25e / RS40e
RS125e / RS126e / RS140e



Set of core drills HSS and HSSE-Co 5 with weldon shank (3/4"), cutting depth 30,0 mm in plastic case

Description	HSS	HSSE Co 5
10-piece set of core drills with weldon shank (3/4") 8 core drills with weldon shank (3/4") Ø 12,0 mm - 14,0 mm - 16,0 mm - 18,0 mm - 20,0 mm - 22,0 mm - 24,0 mm - 26,0 mm + 1 cutting paste 50 g, article-no. 101 021 + 1 ejector pin Ø 6,35 mm x 77,0 mm for cutting depth 30,0 mm article-no. 108 304	108 810	108 810 E
10-piece set of core drills with weldon shank (3/4") 8 core drills with weldon shank (3/4") Ø 2 x 14,0 mm - 2 x 16,0 mm - 2 x 18,0 mm - 1 x 20,0 mm - 1 x 22,0 mm + 1 cutting paste 50 g, article-no. 101 021 + 1 ejector pin Ø 6,35 mm x 77,0 mm for cutting depth 30,0 mm article-no. 108 304	108 813	—



Set of core drills HSS and HSSE-Co 5 with weldon shank (3/4"), cutting depth 30,0 mm in steel case

Description	HSS	HSSE Co 5	HSS TITAN
7-piece set of core drills with weldon shank (3/4") 6 core drills with weldon shank (3/4") Ø 12,0 mm - 14,0 mm - 16,0 mm - 18,0 mm - 20,0 mm - 22,0 mm + 1 ejector pin Ø 6,35 mm x 77,0 mm for cutting depth 30,0 mm article-no. 108 304	108 820	—	108 820 F
7-piece set of core drills with weldon shank (3/4") 6 core drills with weldon shank (3/4") Ø 2 x 14,0 mm - 2 x 18,0 mm - 2 x 22,0 mm + 1 ejector pin Ø 6,35 mm x 77,0 mm for cutting depth 30,0 mm article-no. 108 304	108 840	108 840 E	108 840 F

